

# Surveying commercial fish species and habitat in wind farm areas using a suite of non-lethal survey methods

(Award DE-EE0009799)

Coonamessett Farm Foundation –  
Dr. Liese Siemann, Tasha O'Hara, Farrell Davis, and Luisa Garcia

**National Academies Standing Committee on Offshore Wind Energy and Fisheries:  
Winter Meeting November 18, 2024**



# Collaborators

## **Video trawl survey**

UMASS School of Marine Science and Technology – Dr. Kevin Stokesbury and Nicholas Calebrese

## **Technology development**

Kitware. Inc. – Matthew Dawkins and Dr. Anthony Hoogs

Sexton Corporation – Jeremy Childress and Charley Weller

## **Commercial fishing companies – research vessels and advisory panel**

Arnie's Fisheries

Atlantic Capes Fisheries

Atlantic Shellfish

Eastern Fisheries

Empire Fisheries

Fox Harbor Fisheries

Nordic Inc.

Owen James Fisheries

Quinn Fisheries


Shamrock Fisheries

Viking Village

# Project Objectives

- 1. Develop a methodological framework for monitoring commercial fish and invertebrate species in wind farms using optical surveys**
  - Preferred survey designs
  - Freely available automated detectors and image sets for training new machine learning algorithms
  - Design schematics/technical drawings for any new gear designs (ropeless stationary camera systems and video trawl)
- 2. Evaluate the impacts of offshore wind development on commercial fish and invertebrate species and benthic habitats by conducting spring and fall surveys during pre-construction, construction, and post-construction periods (spring 2025 – fall 2027)**


# Project Timeline

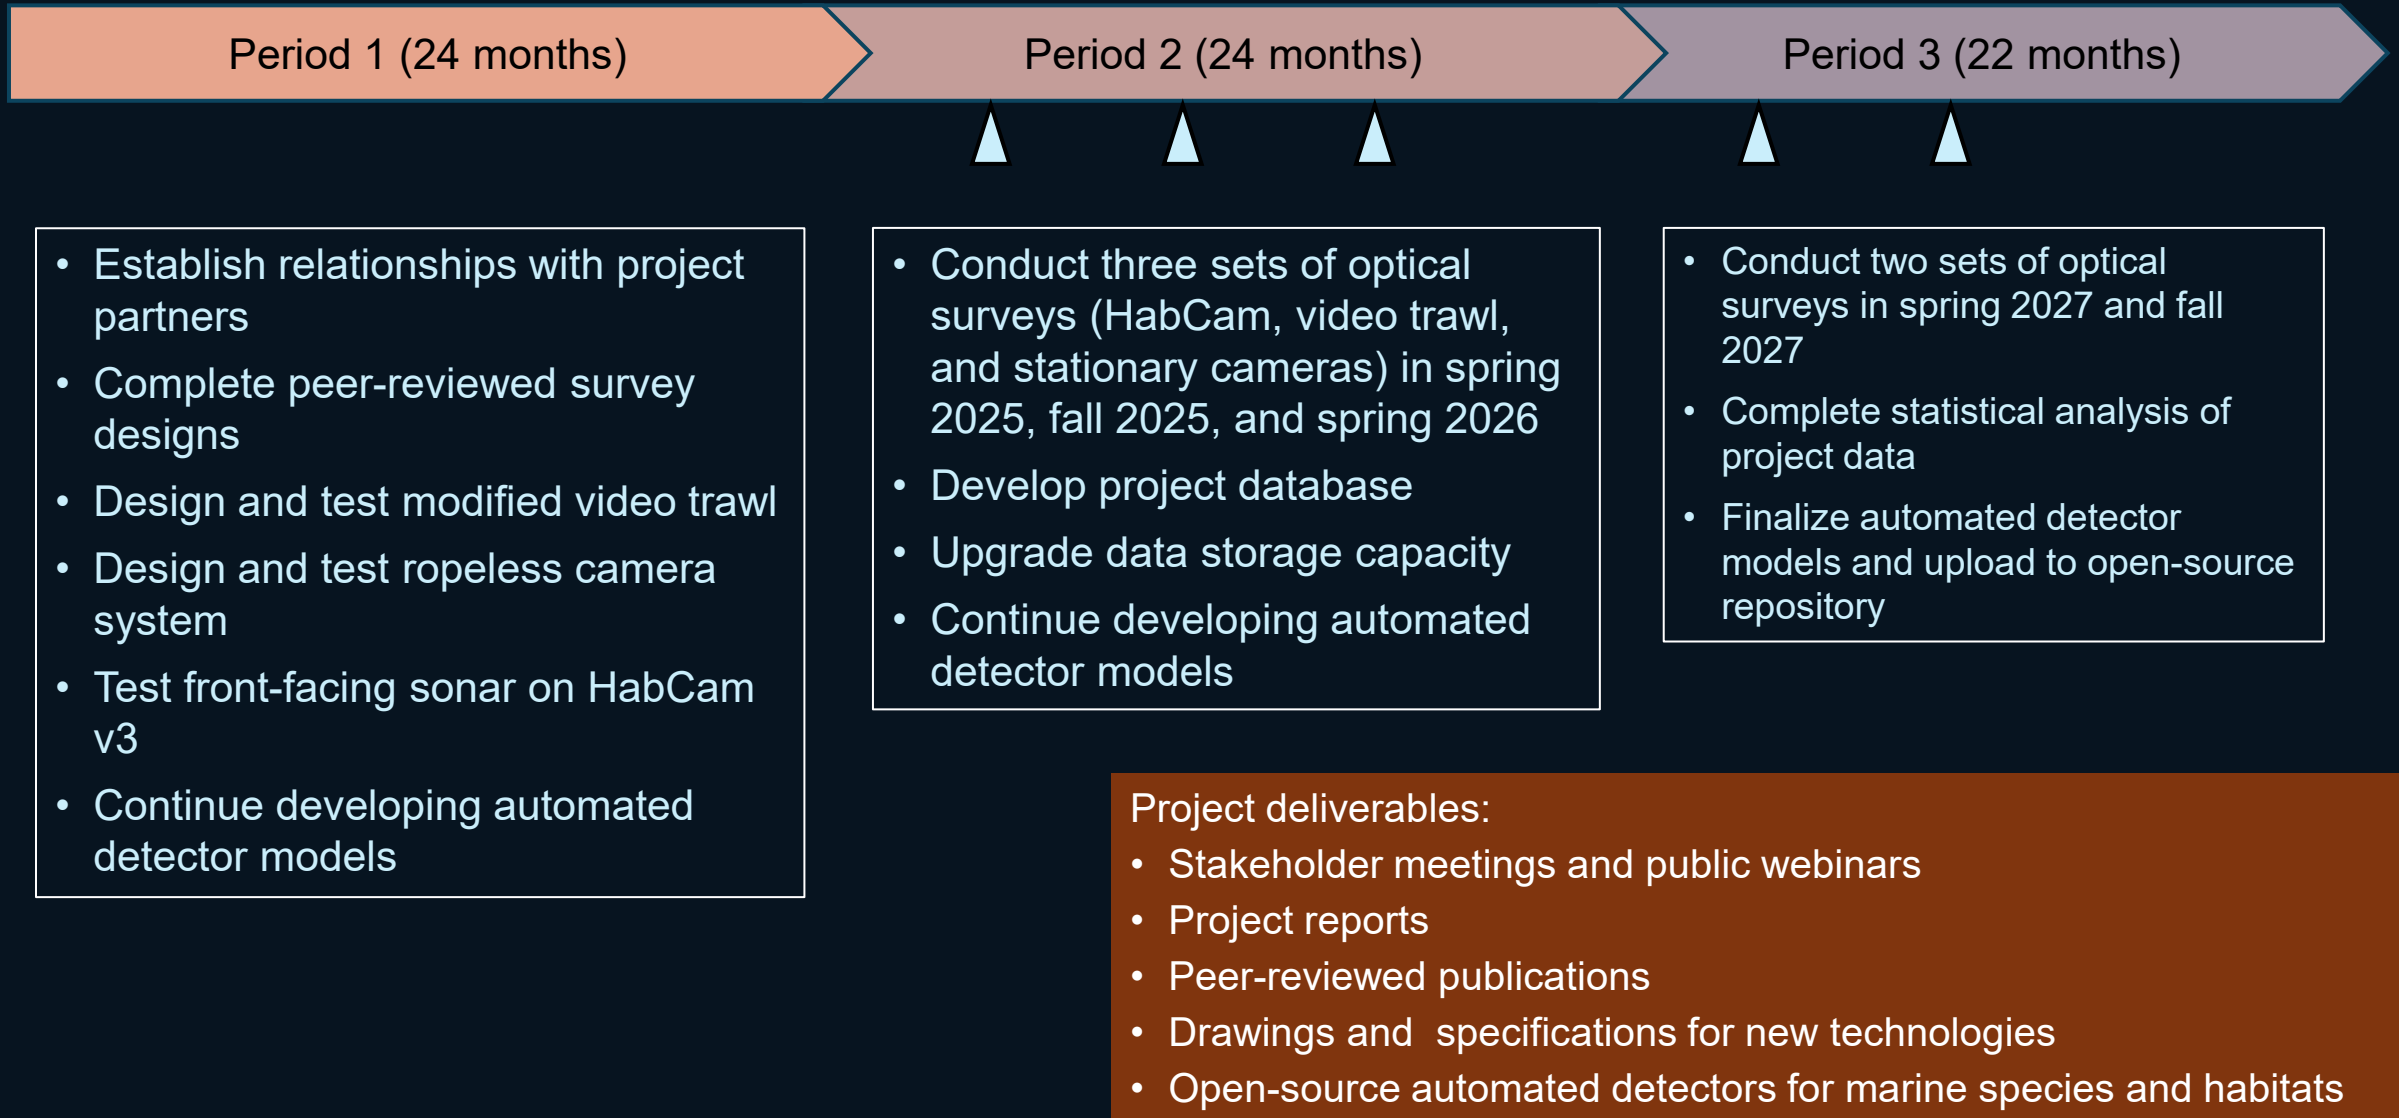



# Project Location


Project surveys will take place in three lease areas held by Ørsted – South Fork Wind (operating), Revolution Wind (under construction), and Sunrise Wind (under construction in 2025)

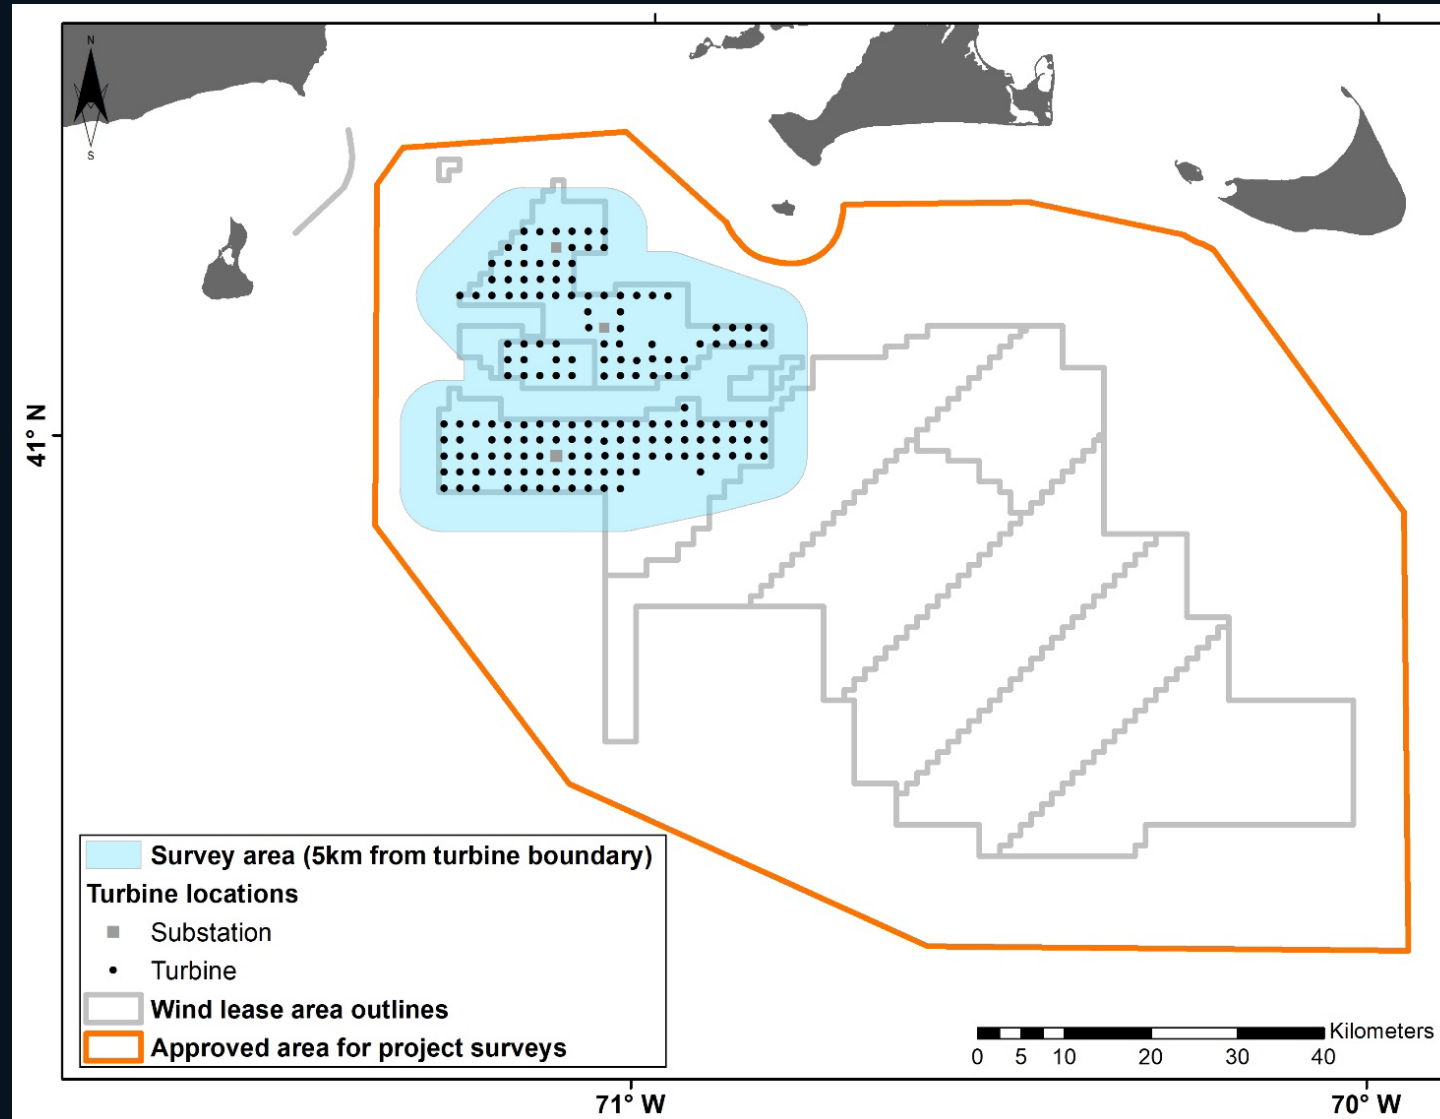

# Focal Species and Fisheries



SPECIES	HABCAM SURVEY	VIDEO TRAWL SURVEY	STATIONARY CAMERA SURVEYS	FISHERY MANAGEMENT PLAN (FMP)
LONGFIN SQUID	X	X	X	Mackerel, Squid, and Butterfish FMP
WINTER AND LITTLE SKATE	X	X	X	Skate Complex FMP
SUMMER FLOUNDER	X	X	X	Summer Flounder, Scup, and Black Sea Bass FMP
SCUP		X	X	Summer Flounder, Scup, and Black Sea Bass FMP
BLACK SEA BASS	X	X	X	Summer Flounder, Scup, and Black Sea Bass FMP
SILVER AND OFFSHORE HAKE	X	X	X	Small-Mesh Multispecies FMP
RED HAKE	X	X	X	Small-Mesh Multispecies FMP
MONKFISH	X	X	X	Monkfish FMP
JONAH AND ROCK CRAB	X		X	Interstate FMP for Jonah Crab
AMERICAN LOBSTER	X		X	Interstate FMP for American Lobster
ATLANTIC COD	X	X	X	Northeast Multispecies FMP
SEA SCALLOP	X			Sea Scallop FMP

# Optical Survey Tools – HabCam v3

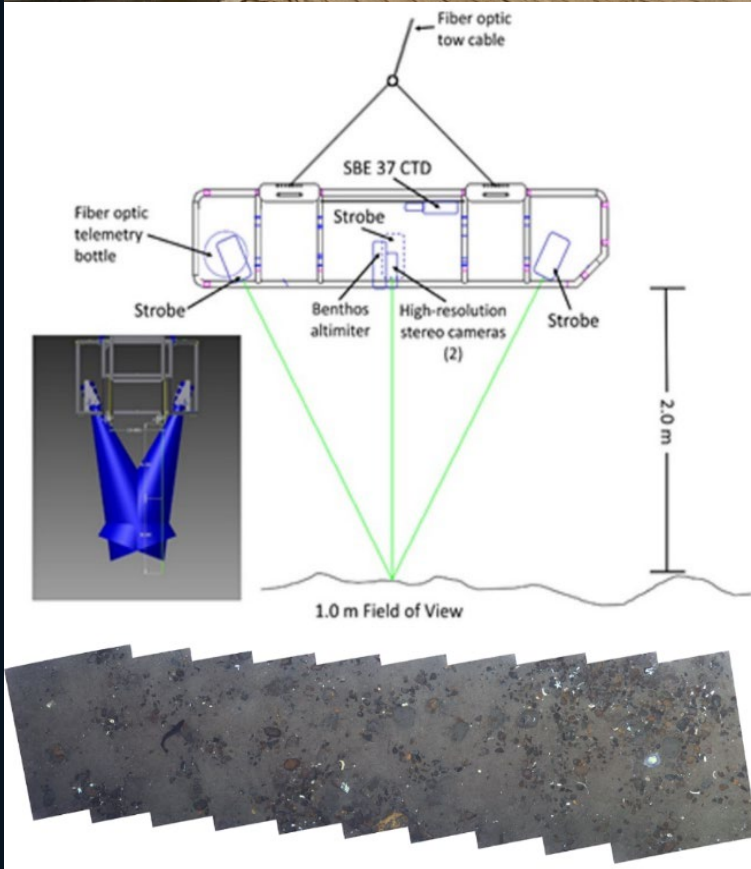

## Towed off-bottom stereo camera system


- 24-hr continuous survey tracks
- Overlapping still images
- Typical annotation rate of 1:100 provides data at 40-m intervals along the track

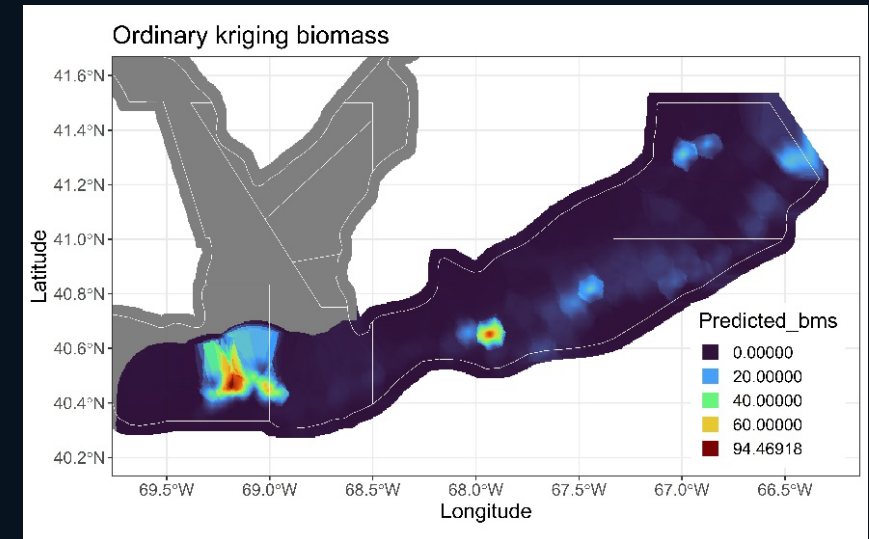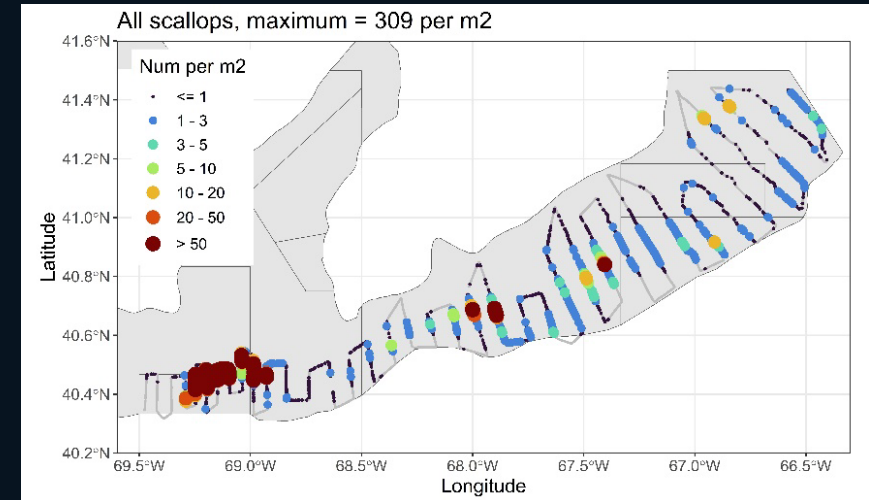

Abundance and biomass maps




# Adding Sonar to HabCam v3

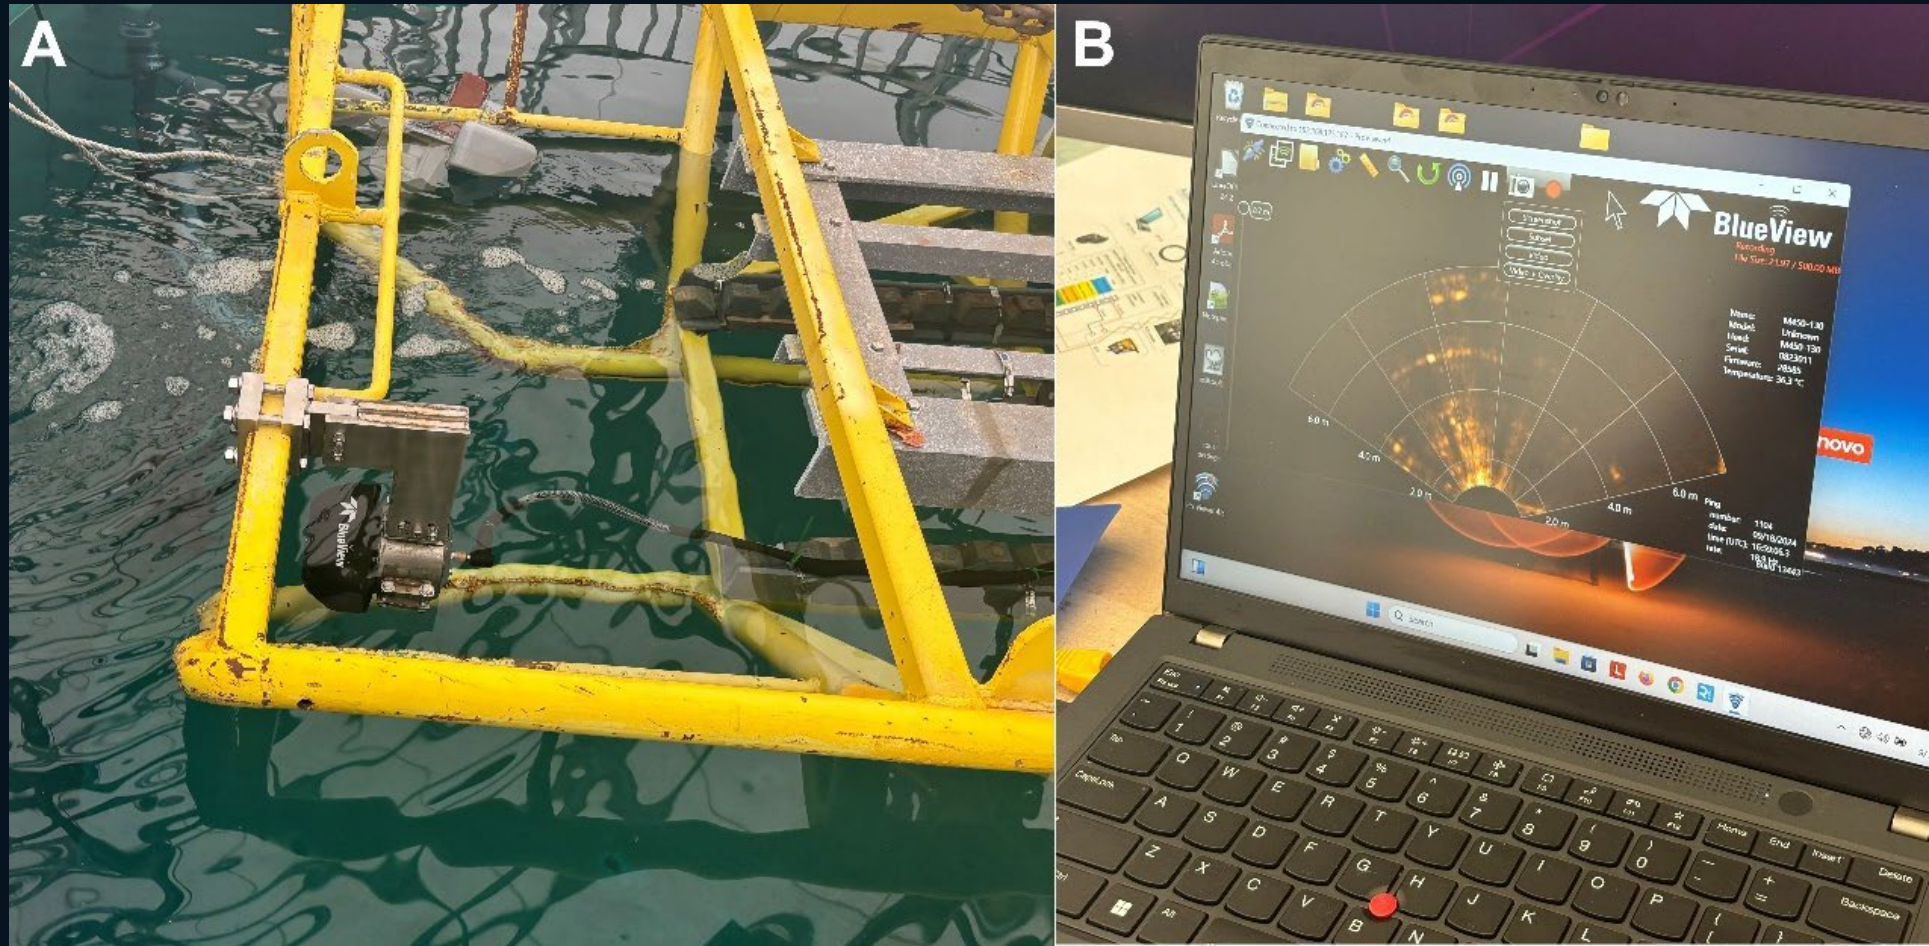

(A) Sonar attached to the HabCam v3 using a custom stainless-steel bracket. (B) Sonar output displayed in the BlueView software.

# Optical Survey Tools – Video Trawl (SMAST)

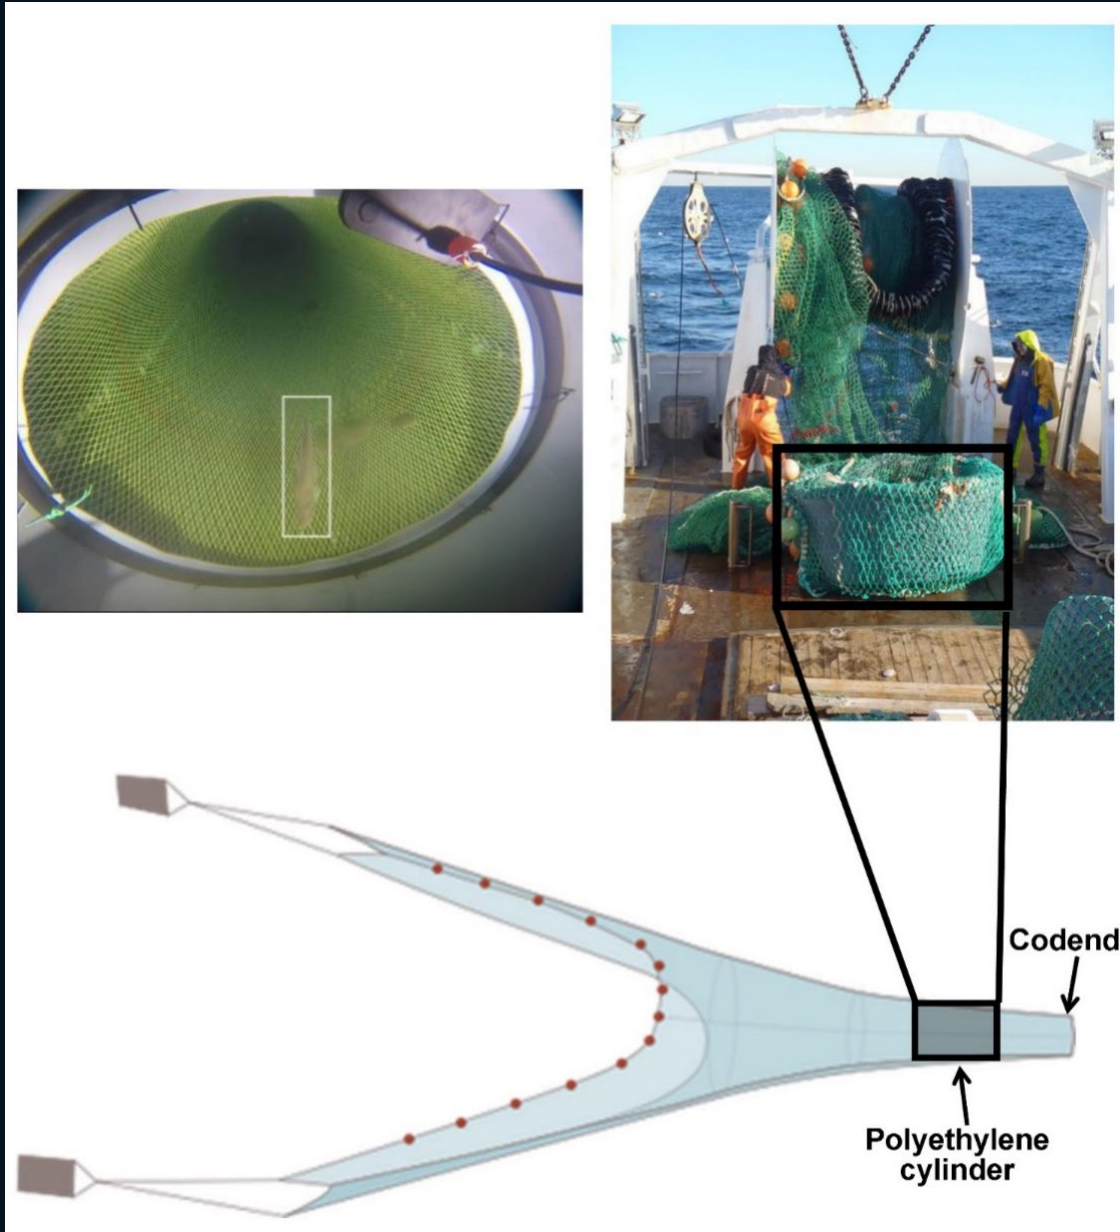


## SMAST video trawl


- Cylinder with cameras and lights, and sensors at the leading edge of the cod end in a standard bottom trawl net
- Fish/other are filmed as they pass into the cod end
- Effective tool for fish surveys over hard bottom when mud clouds do not obscure the video




# Video Trawl Modifications

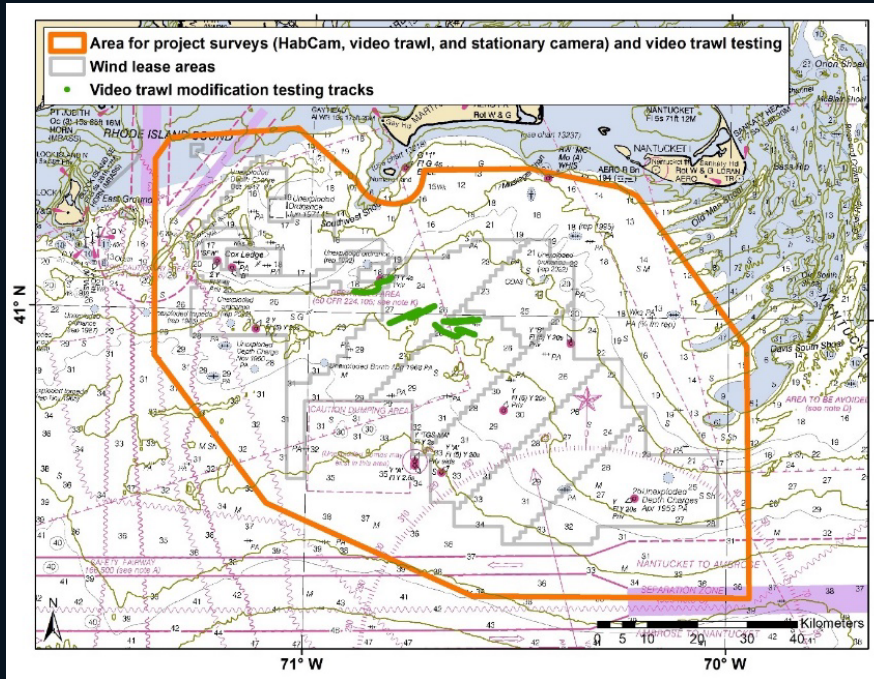

Test tows completed in areas with soft silty bottom aboard the F/V Justice.

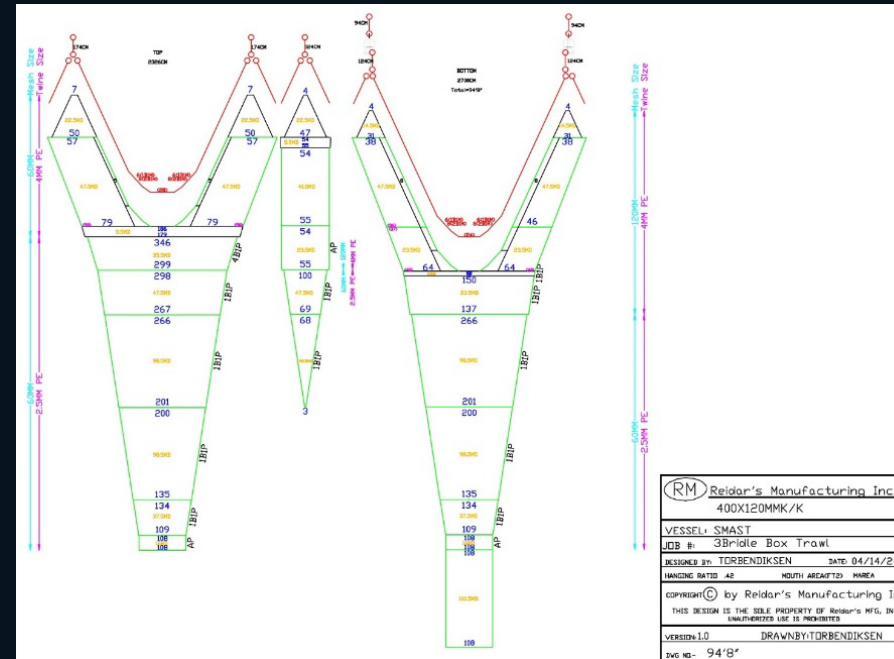

Longer net

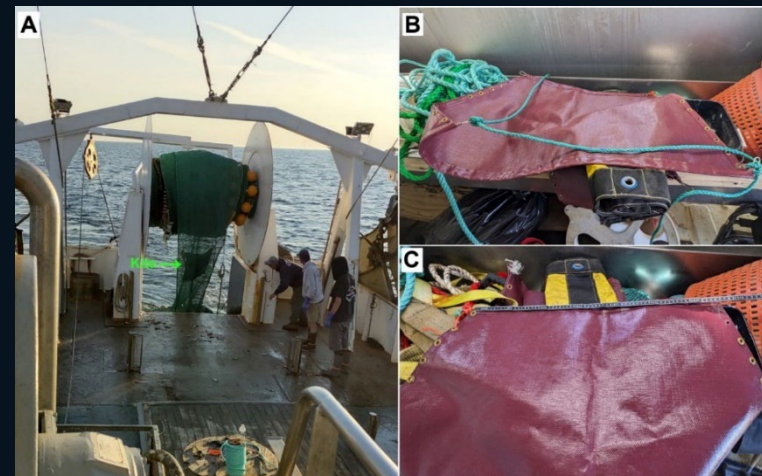

Kite located in front of the codend

# Video Footage Before and After

Old net soft bottom




New net soft bottom





# Optical Survey Tools – Stationary Cameras

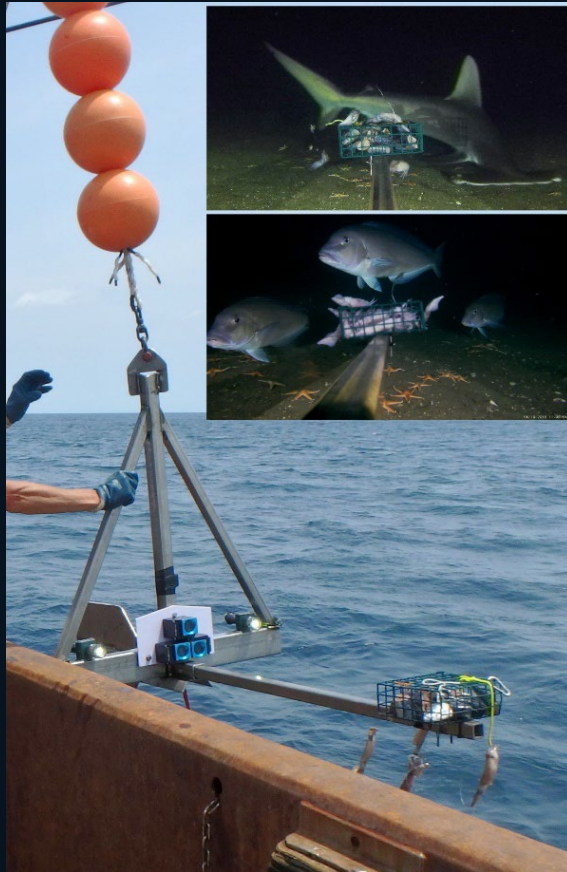

## Anchored systems

- Short deployments
- Mixed of baited and unbaited
- Impacts of lighting
- Custom cameras with hydrophones (Sexton)





## Ropeless systems

- Multi-day deployments over full diurnal and tidal cycles
- Edgetech ropeless lobster traps as base
- Custom cameras with hydrophones and long-term batteries (Sexton)





# Anchored Stationary Camera System

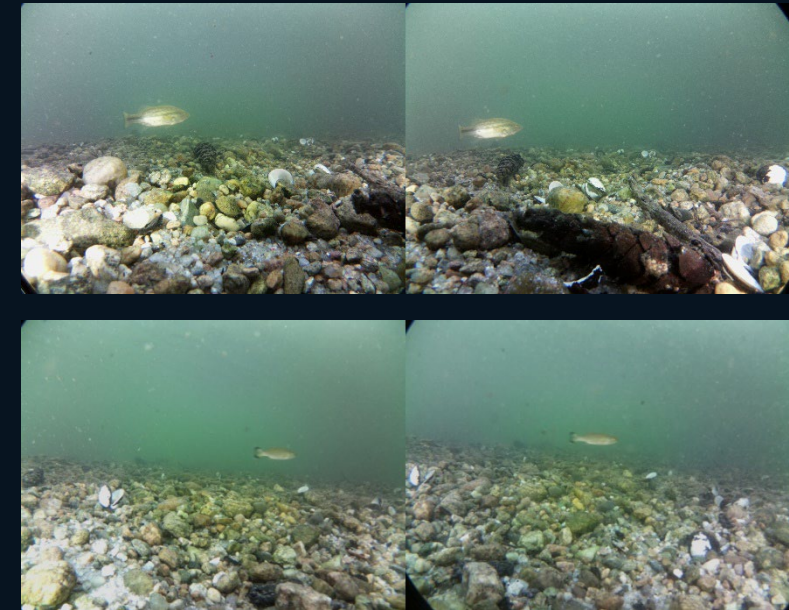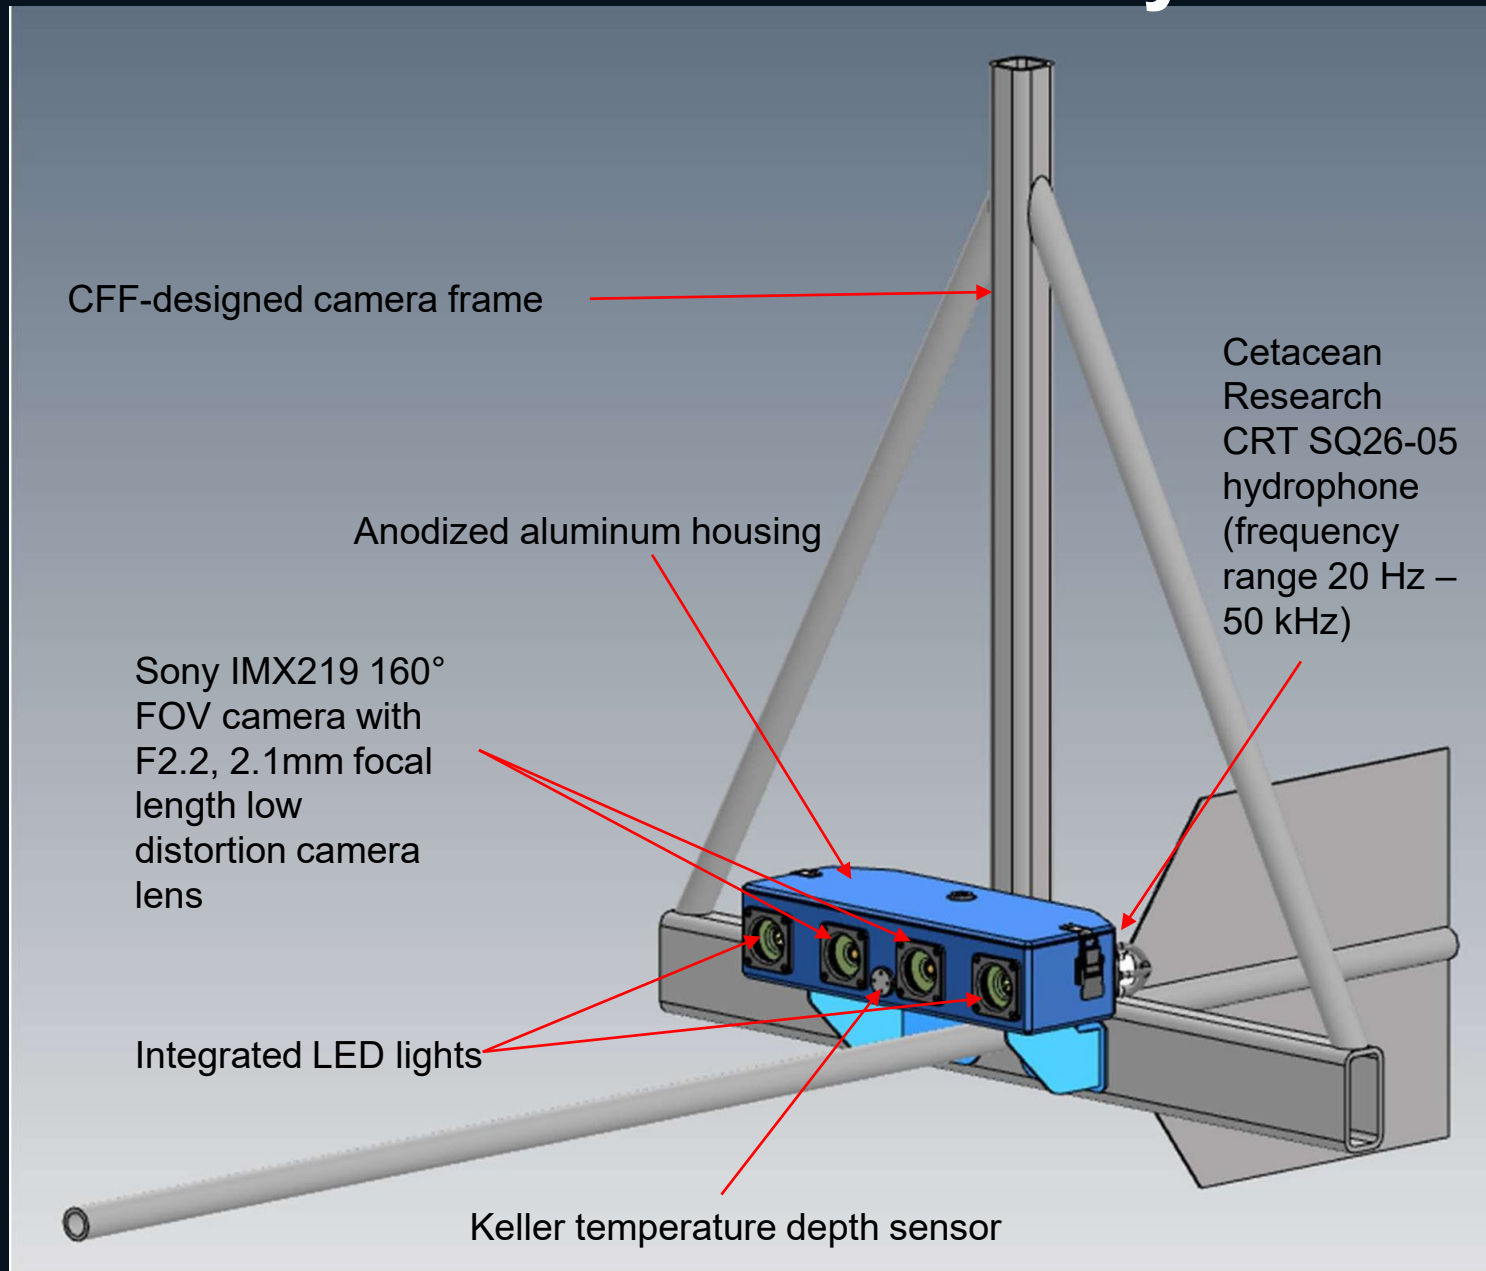

Images from pond testing

# Ropeless Camera System


Testing Edgetech ropeless traps with camera systems in Buzzards Bay aboard the F/V Never Enough.

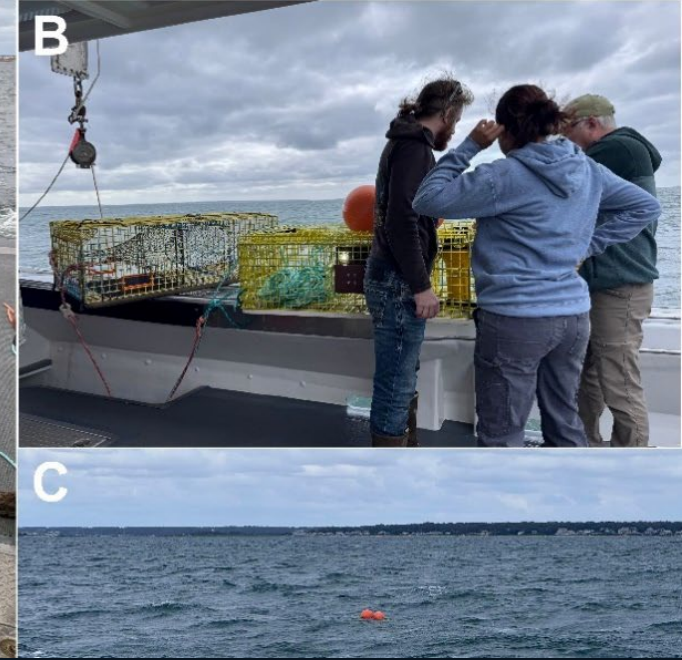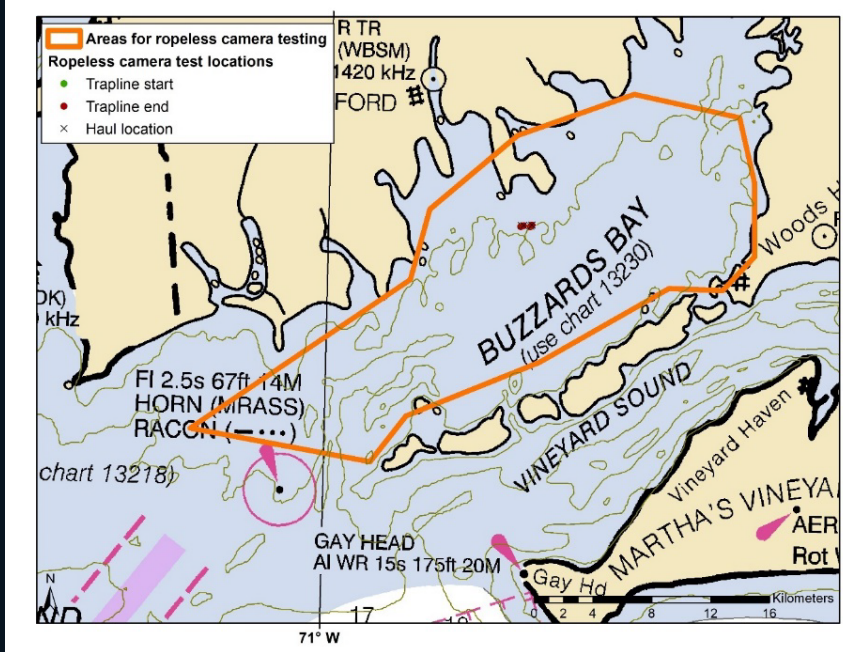



# Video and Image Analytics for Marine Environments (VIAME)

Open-source computer vision software platform designed for do-it-yourself artificial intelligence

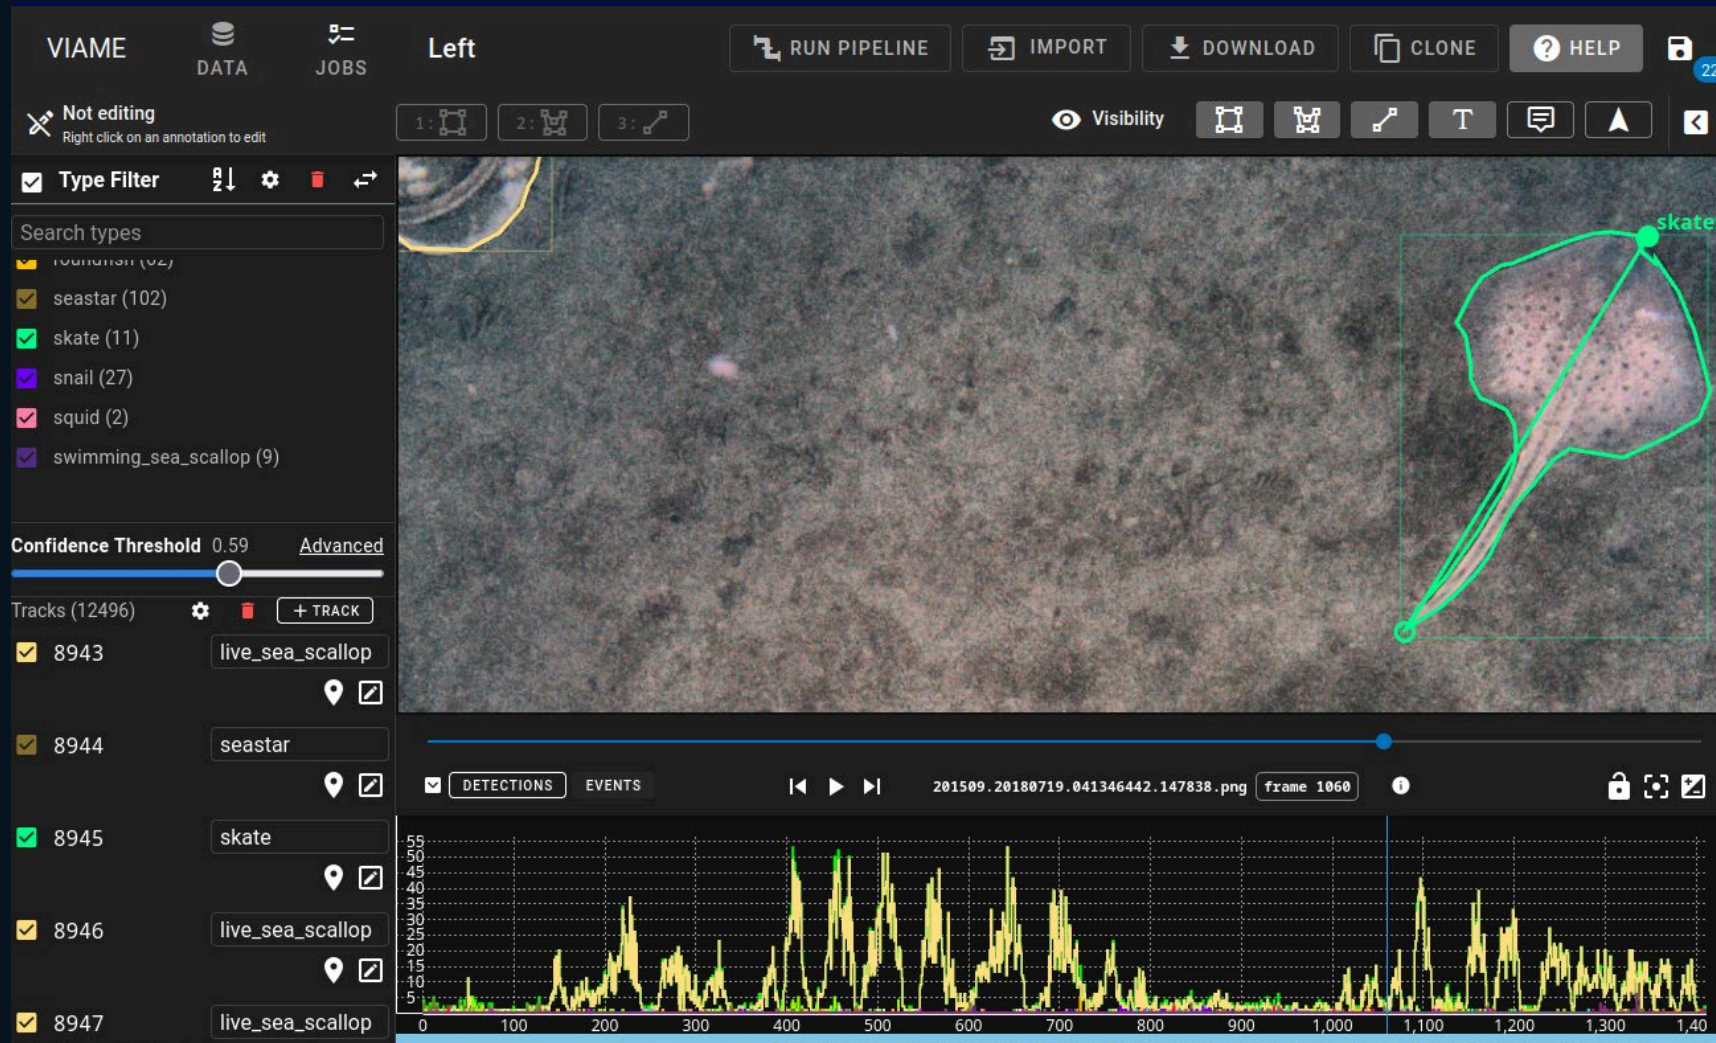




# Automated Detector Models

Improving scallop models developed using other funding (2019 Sea Scallop Research Set-Aside grant)




3D mesh

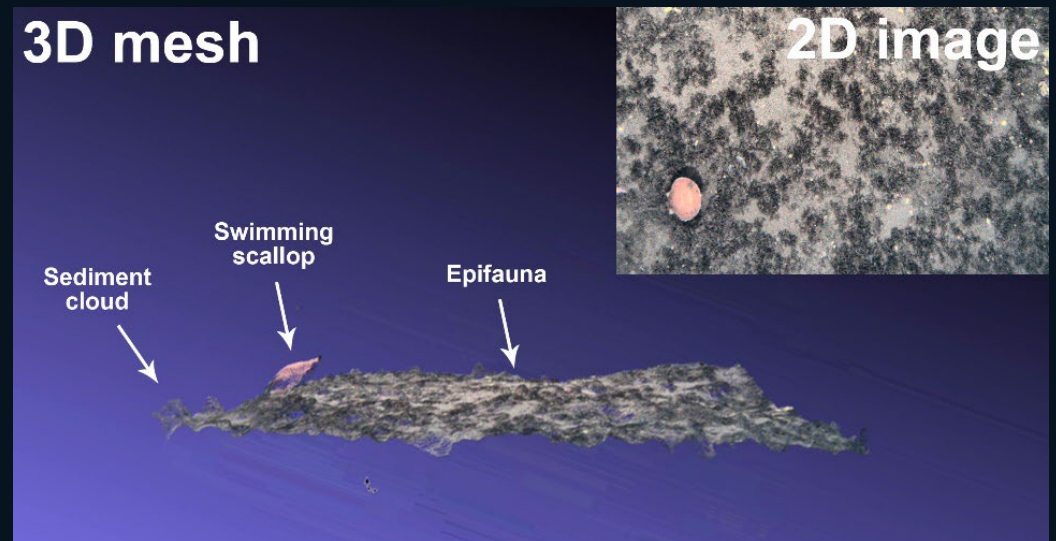



# Automated Detector Models


Improving flatfish models developed using other funding (2019 Sea Scallop Research Set-Aside grant)

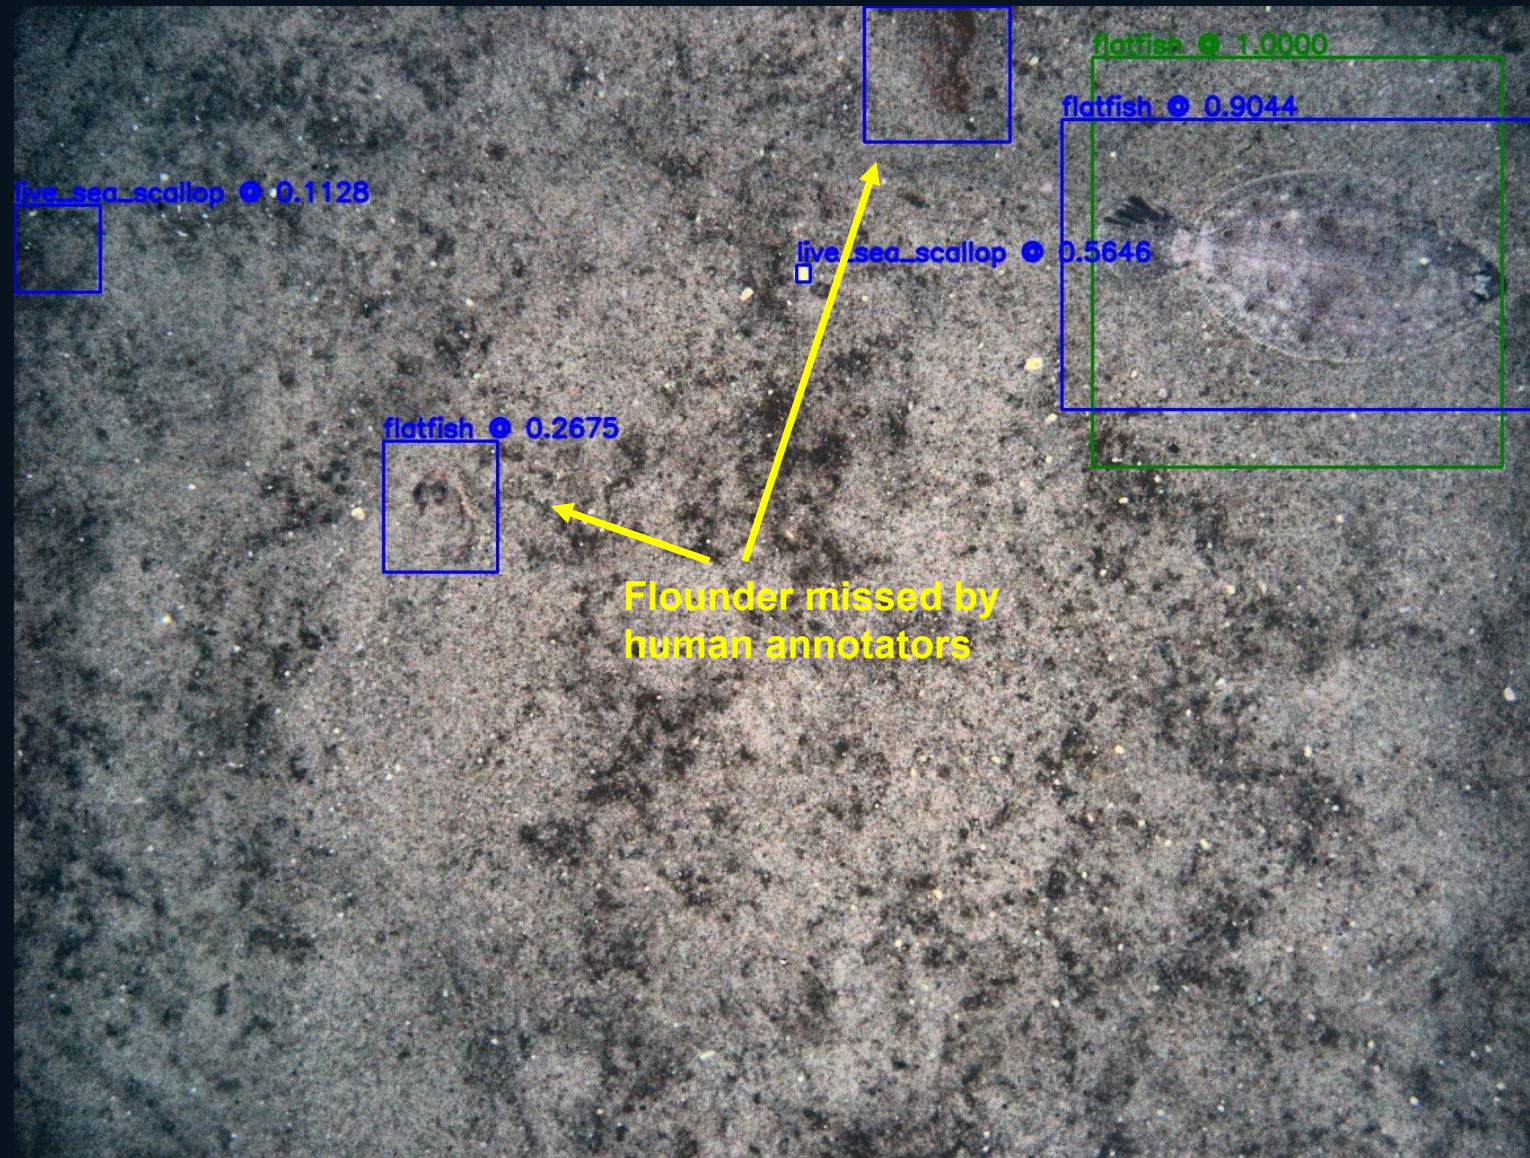



# Automated Detector Models


Stereo Measurement - Automatic Segmentation and Head/Tail ID

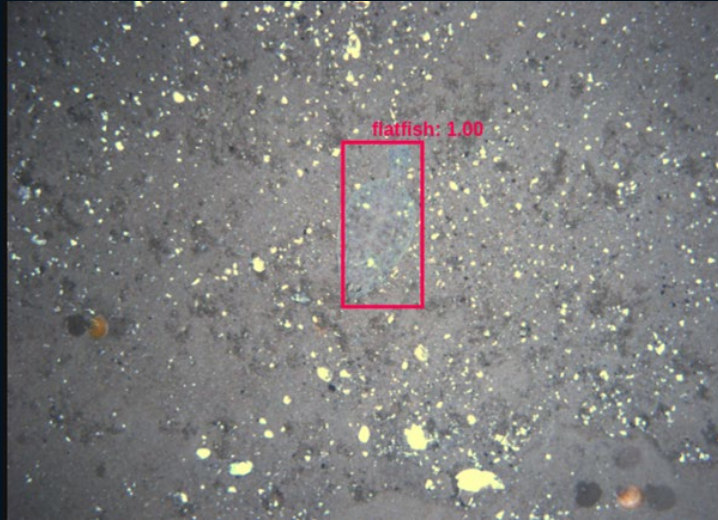

Detection







Mask / Polygon

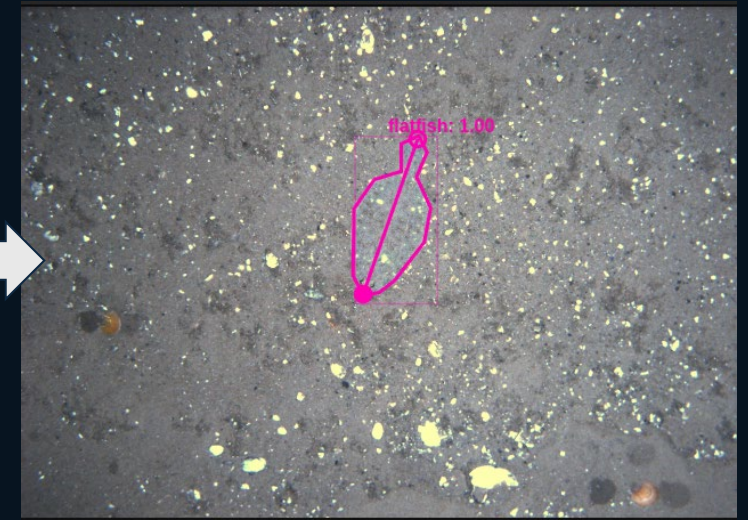

Mask / Tail

# Automated Detector Models

Improving substrate/habitat models developed using other funding (2021 Sea Scallop Research Set-Aside grant)

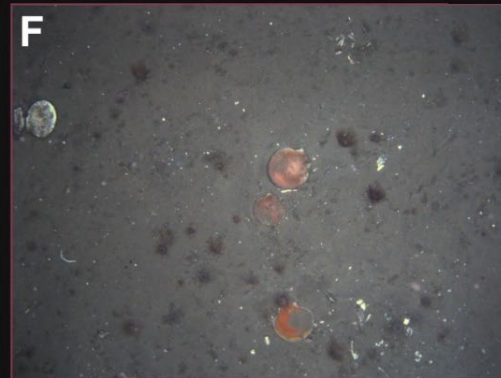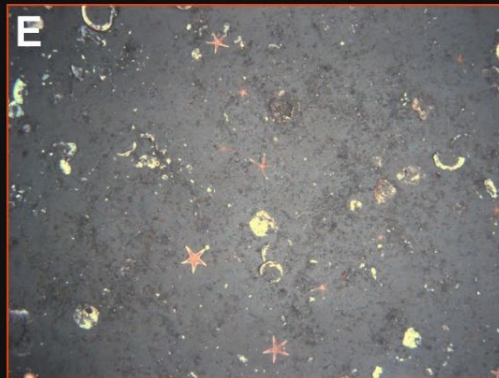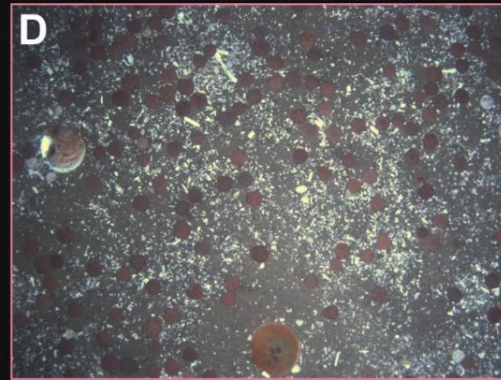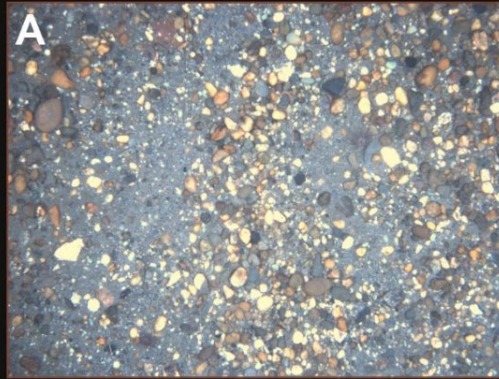

**Examples of output from substrate component detectors.**

**(A) Gravel.**

**(B) Shell hash.**

**(C) Bryozoans.**

**(D) Shell hash plus sand dollar bed.**

**(E) Sea star bed.**

**(F) Burrowing anemone bed.**




# Automated Detector Models


Mid-shot object detection - Trained three detectors for target fish species of interest containing only a low number of annotations (100-500 samples)



Red hake

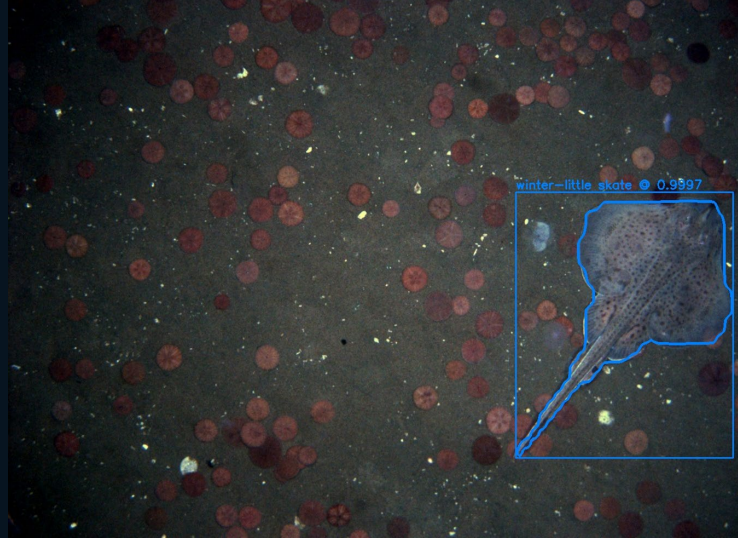


Little/winter skate

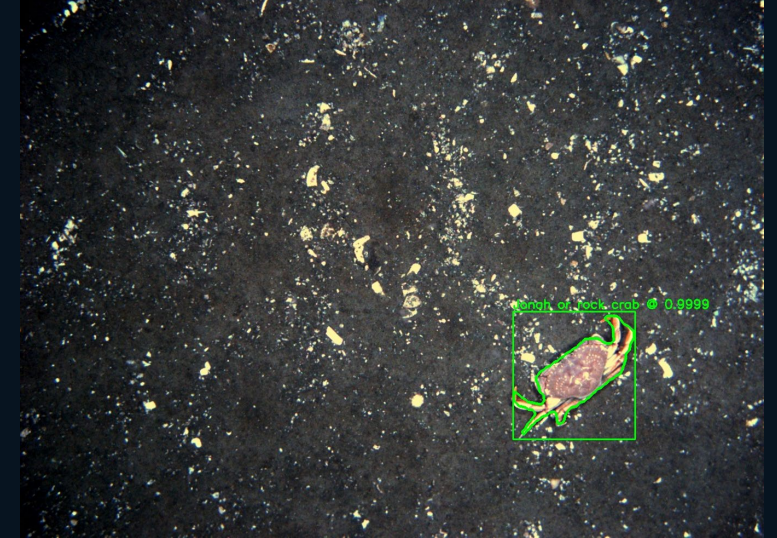

Jonah/rock crabs




# Survey Design - HabCam

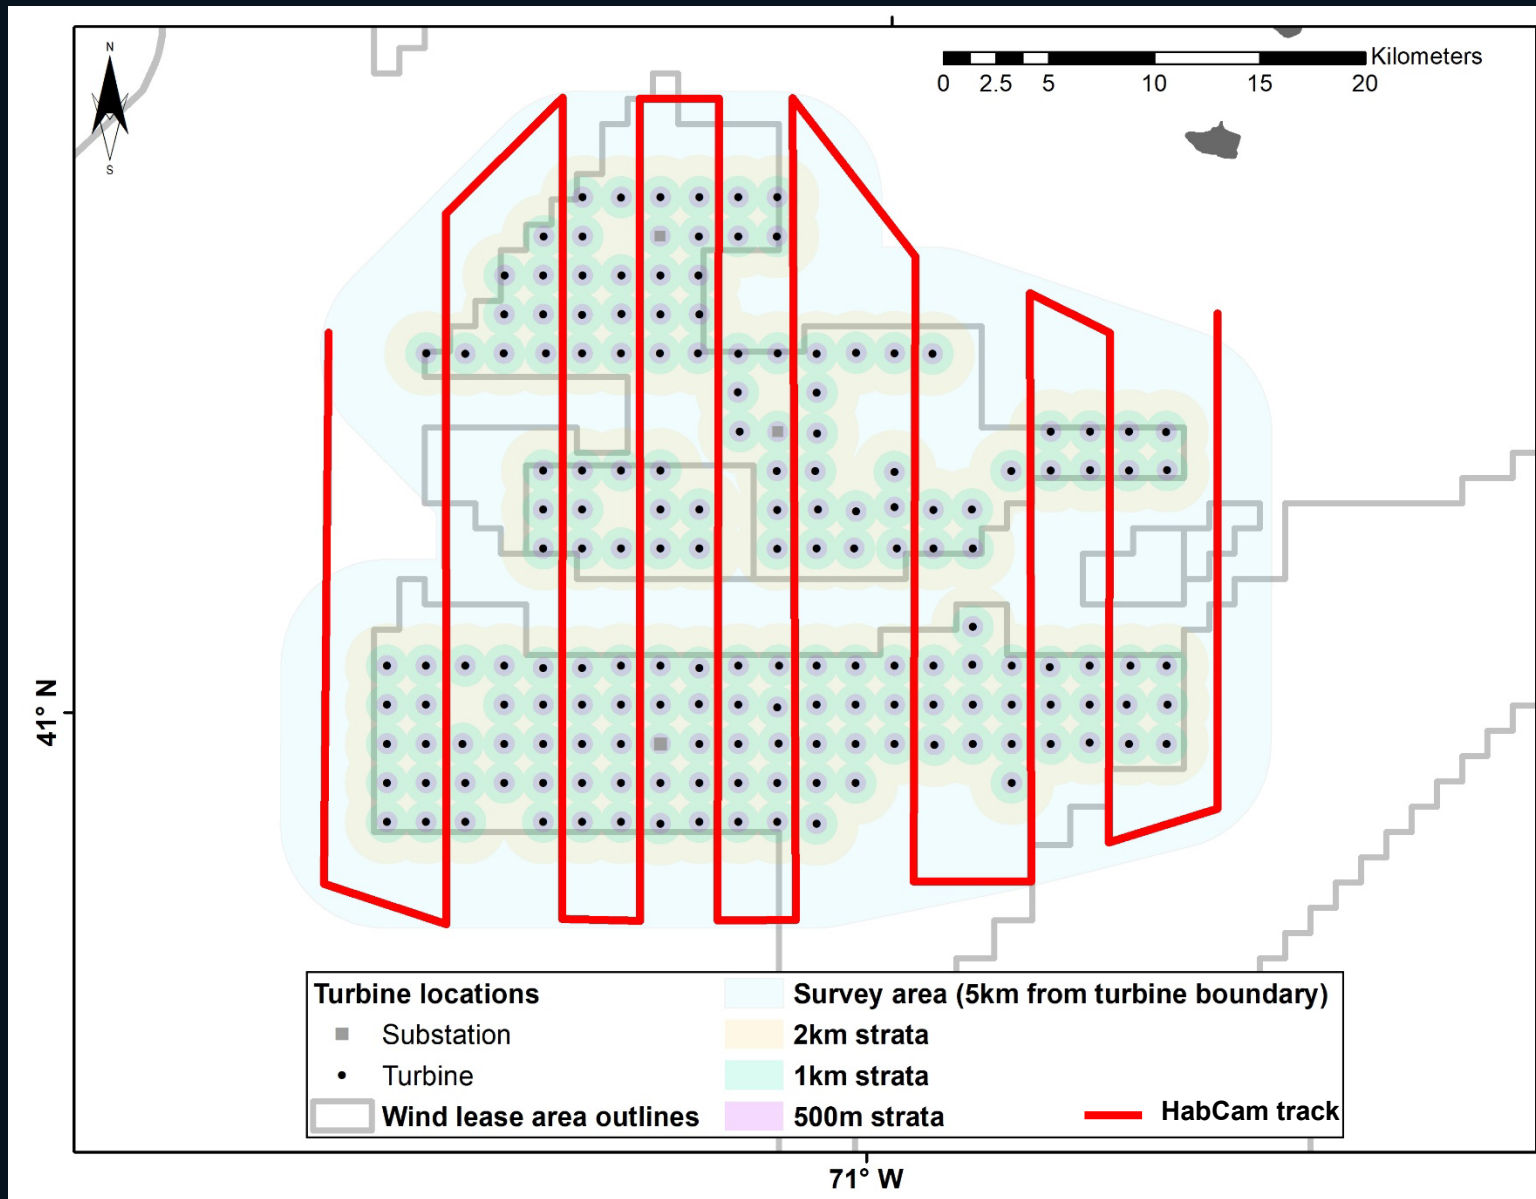


- Set track for each survey
- May be modified based on presence of obstructions
- Relative abundance = density

# Survey Design – Video Trawl

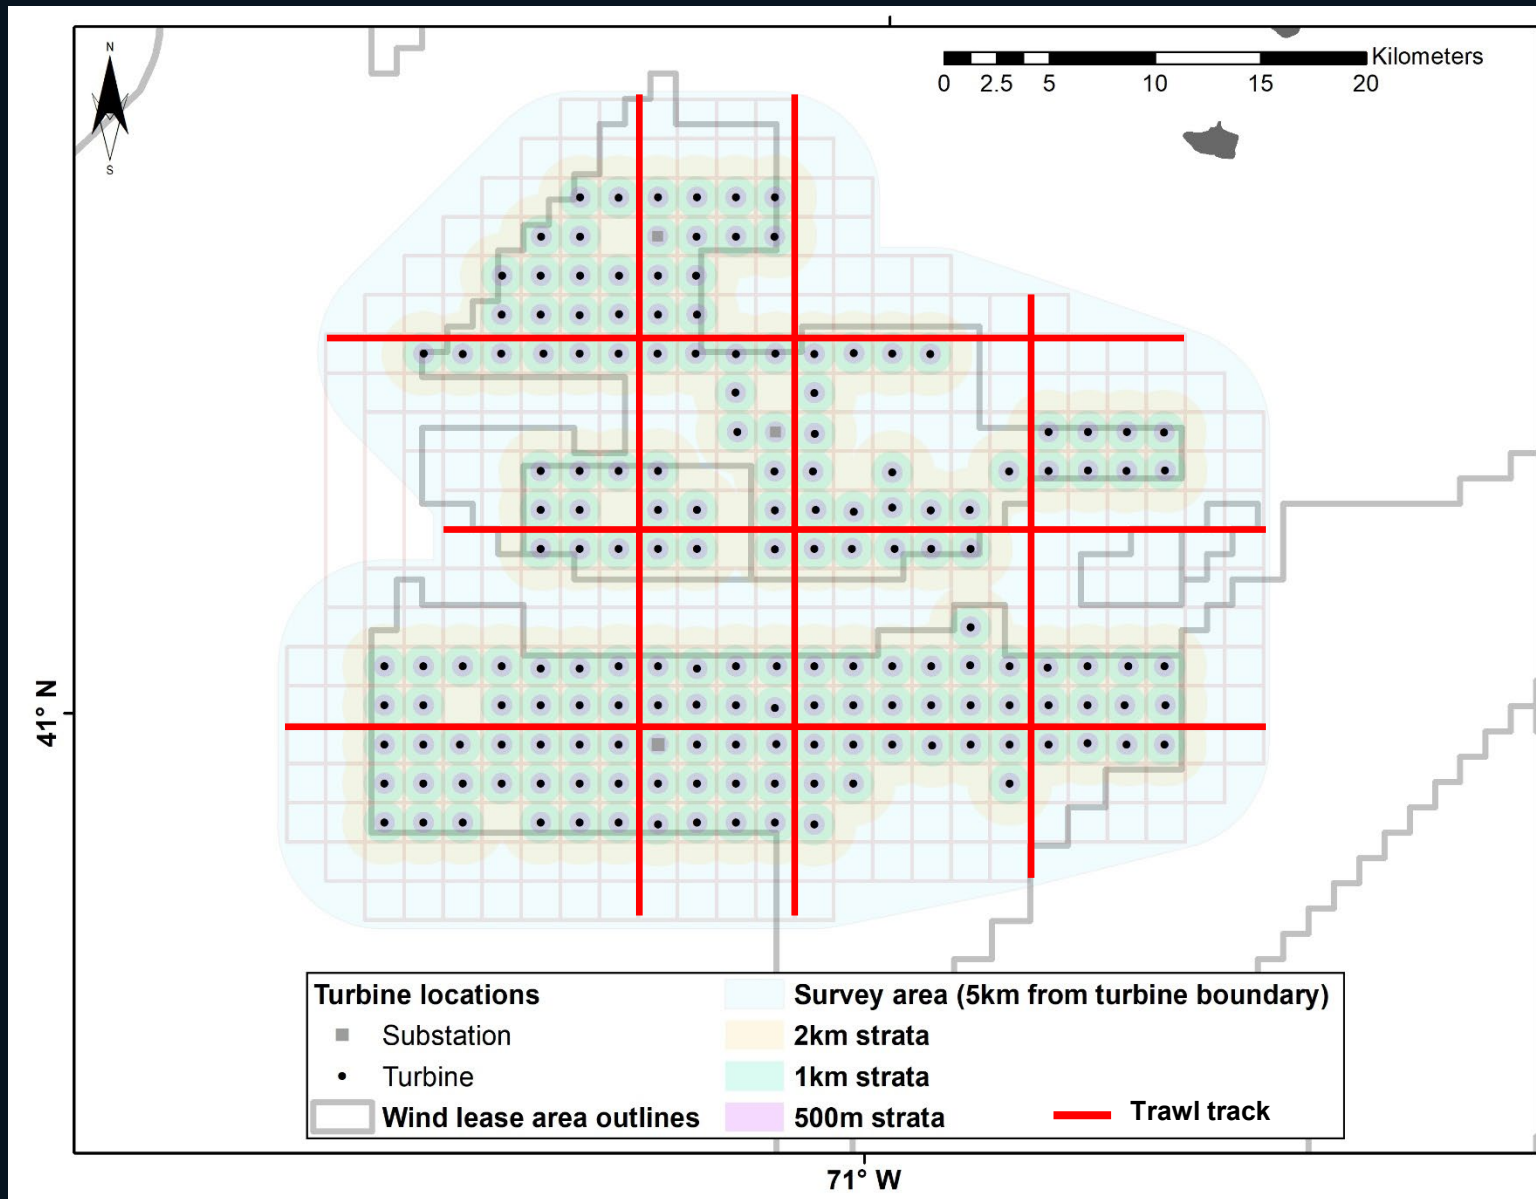

- Random selection of N-S and E-W tracks
- May be modified based on presence of obstructions
- Total number of tracks limited by survey trip length
- Relative abundance = density

# Survey Design – Stationary Cameras

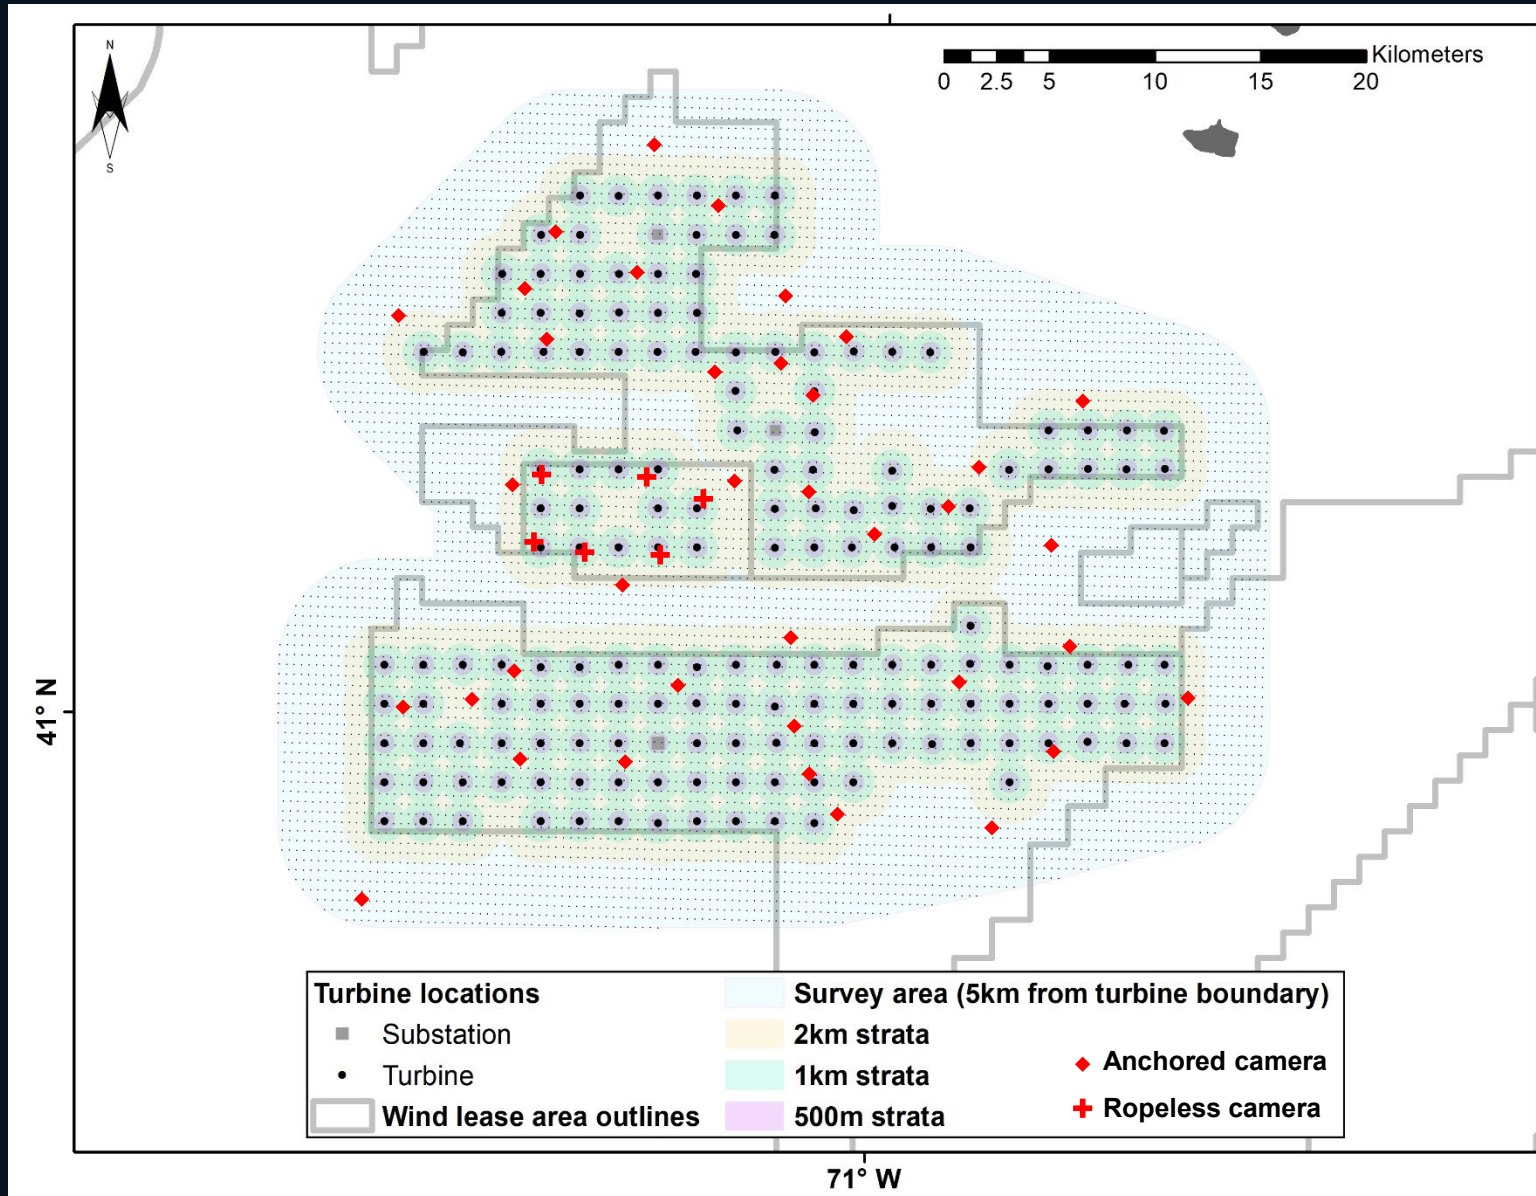

- Random selection anchored and ropeless stationary camera locations (GEBCO grid)
- Six ropeless camera systems deployed per trip near turbine bases only – 7-day deployments
- Total number of anchored stationary cameras limited by survey trip length – 60 to 90-min deployments
- Relative abundance = MaxN

# Modeling Wind Farm Impacts

Expect to use generalized additive mixed models to model species relative abundance as a function of the factors shown below.

## By survey

*Relative Abundance ~*

*Distance from turbine base +*

*Proximity to other wind farms +*

*Bottom depth +*

*Bottom temperature +*

*Sound level (under 200 kHz)+*

*Habitat type +*

*Season*

Distance from turbine base =  
Pre-defined distance strata  
and  
Post-hoc stratification

## Aggregated

*Relative Abundance ~*

*Distance from turbine base +*

*Proximity to other wind farms +*

*Bottom depth +*

*Bottom temperature +*

*Sound level (under 200 kHz)+*

*Habitat type +*

*Season +*

*Survey type*

Distance from turbine base =  
Pre-defined distance strata



# Next Steps

## 1. Finalize custom stationary cameras

- Improved operation – mechanical on/off switch and easy image back-up
- Improved housing geometry
- Improved internal wiring and component placement
- Option to swap out lenses

## 2. Complete first set of surveys in spring 2025

